




DuPont™ Cyrel® DPC

The Low Durometer Digital Plate for the Corrugated Market

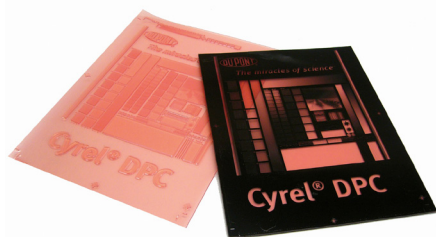

DuPont™ Cyrel® DPC

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analog and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

DuPont™ Cyrel® DPC is a soft digital plate which has been developed especially for the corrugated market. Highest quality results are achieved on any type of corrugated board using water-based inks.

Applications

- Corrugated post-print
- Sacks
- Rough paper surfaces

Product Features

- Excellent ink transfer permits superior printing uniformity
- High exposure resolution results in better quality reproduction
- Image relief is clean and sharp
- Exceptional exposure latitude allows single exposure without masking
- Excellent thickness uniformity
- Less make ready time
- High resistance to ozone and white light results in excellent storage capability

Printing Ink and Solvent Compatibility

Cyrel® DPC offers excellent compatibility with water-based inks.

Process of Use

Expose the plate through the back to establish the floor and maximize sensitivity. Back exposure varies according to relief required. Remove the protective coversheet and image the plate with a Cyrel® Digital Imager (CDI). Expose the front of the plate surface. Process the plate in a Cyrel® solvent processor to remove unexposed polymer. Finish the plate in a light finisher to eliminate surface tackiness.

Storage – Raw Material

Store unexposed plates in a cool area (40–90°F, 4–32°C), away from direct sources of heat. Humidity control is not required. Cyrel® DPC is foam interleaved to provide maximum protection of the plate after manufacture, and during transportation and storage.



Download latest version



DuPont™ Cyrel® DPC

The Low Durometer Digital Plate for the Corrugated Market

Plates should be stacked flat. Plates should not be exposed to direct sunlight or excessive white light. Continuous exposure to very high ozone concentrations should be avoided.

Handling – Raw Material

DuPont™ Cyrel® DPC plates should be handled under UV free light; e.g. fluorescent tubes covered with amber sleeves.

Storage – Finished Plates

After printing, plates should be thoroughly cleaned with a compatible solvent before storing. They may be stored on cylinders, sleeves or demounted and stored flat.

Technical Data		
	Cyrel® DPC 112 Thickness 0.112" / 2.84 mm	Cyrel® DPC 125 Thickness 0.125" / 3.18 mm
Durometer	38 Sh A	37 Sh A
Image Reproduction	1–98% / 48 L/cm	1–98% / 48 L/cm
Minimum Positive Line Width	5 mil / 0.125 mm	5 mil / 0.125 mm
Minimum Isolated Dot	250 µm	275 µm
Relief Depth	0.039" / 1.00 mm	0.039–0.059" / 1.00–1.50 mm

	Cyrel® DPC 155 Thickness 0.155" / 3.94 mm	Cyrel® DPC 250 Thickness 0.250" / 6.35 mm
Durometer	36 Sh A	35 Sh A
Image Reproduction	1–98% / 42 L/cm	2–95% / 34 L/cm
Minimum Positive Line Width	12 mil / 0.300 mm	12 mil / 0.300 mm
Minimum Isolated Dot	500 µm	500 µm
Relief Depth	0.059–0.079" / 1.50–2.00 mm	0.098–0.118" / 2.50–3.00 mm

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

United States

DuPont Packaging Graphics
Chestnut Run Plaza, Bldg. 702
974 Centre Road
Wilmington, DE 19805
800-345-9999

Canada

DuPont Packaging Graphics
1919 Minnesota Court
Mississauga, ON L5N 0C9
Canada
905-816-3238

www.cyrel.com/na

© 2014 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.