

# DuPont™ Delrin® 511CPE

Combining the enhanced crystallization technology of the DELRIN® 511 series for faster cycle times, excellent creep and fatigue resistance, and dimensional stability with state-of-the-art low-emission technology

## General Information


DuPont™ Delrin® is excited to announce Delrin® 511CPE, the second addition to our new CPE family of products.

Delrin® 511CPE delivers the superior performance our customers expect from our Delrin® 511 series with:

- Dimensional stability
- Tensile modulus (stiff without the use of fibers)
- Impact strength (including low temperatures)
- Creep resistance
- Fatigue resistance
- 20% less mold deposit with 511CPE than with 511P

Without compromising performance, the new DuPont™ Delrin® 511CPE adds:

- **Low emission (below 2 ppm due to VDA 275)**

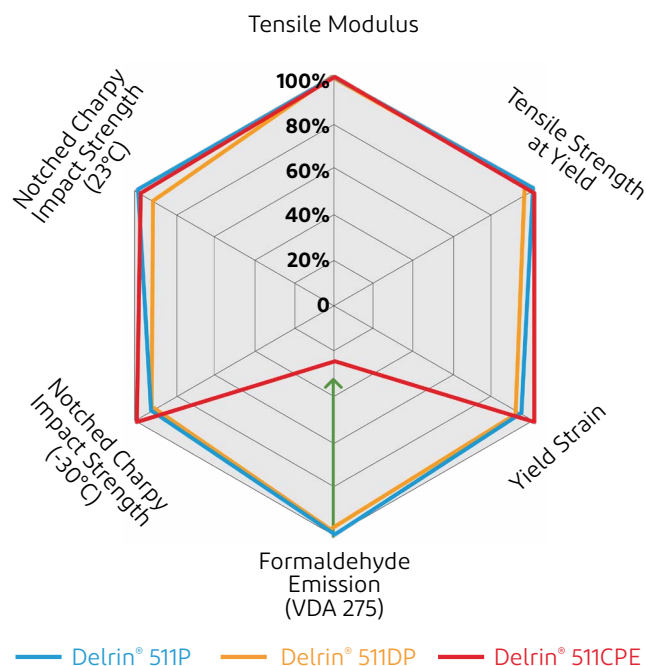

## Properties Overview

Properties	Unit	Test method	511P NC010 (reference)	511DP NC010 (reference)	511CPE NC010 (low-E)
Melt mass-flow rate (MFR 190°C, 2.16kg)	g/10min	ISO 1133	15	14	14
Mold shrinkage (parallel / normal)	%	ISO 294-4	1.8 / 1.7	1.9 / 1.8	1.8 / 1.8
Density	g/cm <sup>3</sup>	ISO 1183	1.42	1.42	1.42
Melting temperature, 10°C/min	°C	ISO 11357-1/-3	178	178	178
Notched Charpy at 23°C	kJ/m <sup>2</sup>	ISO 179/1eA	7	6.5	7
Notched Charpy at -30°C	kJ/m <sup>2</sup>	ISO 179/1eA	6	6	6.5
Tensile strength at yield	MPa	ISO 527-1/-2	75	75	77
Yield strain	%	ISO 527-1/-2	12	12	13
Nominal strain at break	%	ISO 527-1/-2	25	25	25
Tensile modulus	MPa	ISO 527-1/-2	3400	3400	3400
Flexural strength at 3.5% strain	MPa	ISO 178	88	89	89
Flexural modulus	MPa	ISO 178	3200	3200	3200

# DuPont™ Delrin® 511CPE Homopolymer

## Outperforms both Medium and High Molecular Weight Acetal Copolymers


DuPont™ Delrin® 511CPE homopolymer delivers superior performance compared to competitive medium molecular weight (MW) copolymers, as well as competitive high MW copolymers:

- 20% higher tensile properties
- Impact resistance (15% higher vs. MMW) over a large temperature range
- Significantly better flow which permits:
  - better fill of thinner-wall cavities
  - more effective design of thin-wall parts

**Plus, Delrin® 511 CPE offers low VOC emissions (below 2 ppm due to VDA 275).**

In addition to the ability to make durable parts at potentially higher production rates, when you work with DuPont, you can count on getting the support you need. Consistent quality; supply stability; and design, technical, and processing support help ensure that production of your high quality part delivers on its promise.

When all of these benefits are taken into account, designing with Delrin® in mind will lead to lower cost per part.

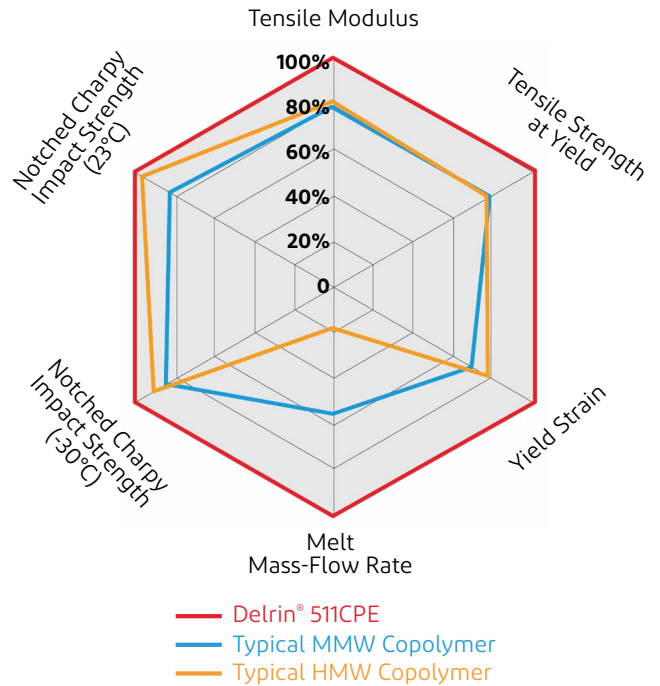

[dupont.com](http://dupont.com)

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2019 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.



Transportation & Industrial

Form No. 001-20008-HMC0319