


DuPont™ Cyrel® 1000 P

State-of-the-Art Processor



[View Hi Res Image](#)

DuPont™ Cyrel® 1000 P

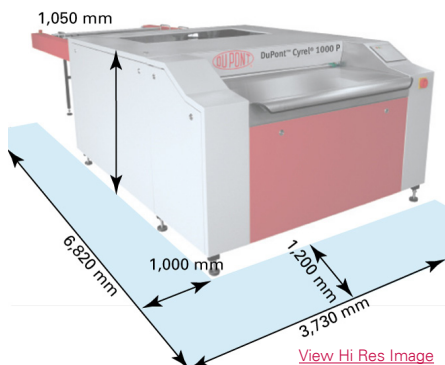

[View Hi Res Image](#)

Floor Plan



Play Video



Download latest version

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates ([analogue](#) and [digital](#)), Cyrel® platemaking equipment, [Cyrel® round sleeves](#), [Cyrel® plate mounting systems](#) and the revolutionary [Cyrel® FAST thermal system](#).

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® 1000 P is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

DuPont™ Cyrel® 1000 P

Benefits

- Maximum plate size 900 x 1,200 mm (36" x 48")
- Innovative washout concept
- High dot resolution and fine line definition
- Integrated viscosimeter
- Robust and easy to support
- Optimum productivity

Product Features

DuPont™ Cyrel® 1000 P is capable of processing high quality photopolymer plates up to a format of 900 x 1,200 mm (36" x 48"). The unit is easy to support and maintain, simple to operate, and extremely reliable robust and cheap to run.

High dot resolution, excellent line definition, deep reverses and clean floor are achieved to meet the highest Flexo standard irrespective of whether thick, thin, narrow or large plates are being processed.

An innovative washout concept consisting of six flat brushes transverse to each other, and contra-rotating round brushes wash out the non-polymerised parts of the plate. Cleaning takes place through contra-rotating round brushes moistened with fresh solvent, clearing the plate of washout solution.

At the exit section, the plate is pulled over a rotating plush surface and pre-dried. At the same time the relief side can air dry.

The solvent temperature is programmable between 20°C to 40°C (68°F to 104°F) to handle different brands of solvents available to the industry. The speed at which the plates pass through can be preset to adapt to the individual plate types. The integration of fresh solvent is controlled via a viscosimeter, which is constantly monitoring the solvent saturation during the entire process. The unit is operated and controlled through a large colour touch screen panel. The computer control board may store up to 21 different washout plate programs.

DuPont™ Cyrel® 1000 P

State-of-the-Art Processor

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 1000 P	Incremental solvent processor
SAP Article Number	MH78132	
Plate Thickness	0.5 mm to 7.0 mm	0.019" to 0.27"
Max. Nominal Plate Width	900 mm (36")	
Min. Nominal Plate Width	200 mm (7.9")	
Max. Nominal Plate Length	1,200 mm (48")	
Fresh Solvent Tank	17 litres (3.7 Gal) UK	
Min. Solvent Volume for Operation	70 litres (15.4 Gal) UK	
Max. Solvent Volume for Operation	90 litres (19.8 Gal) UK	
Max. Tank Volume	115 litres (25.3 Gal) UK	
Electrical (Field Configurable)	380 / 400 Volt–50/60 hz; 220 / 230 Volt–50/60 hz	3Ph / N / PE; 3Ph / PE
Power (Nominal)	5 kW	
Current (Nominal Load)	16 Amp @ 400 Volt; 25 Amp @ 230 Volt	
Connecting Wires	400 Volt configuration; 230 Volt configuration	5 x 2.5 mm²; 5 x 2.5 mm²
Grounding	≤ 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
Exhaust (Light Finisher)	Ø 100 mm (3.9")	200 m³ / h–117.7 scfm
Environmental Data	Temperature range: 15°C to 30°C (59°F to 86°F)	Relative humidity from 40% to 60% non-condensing
Compressed Air Supply	6 bar minimum	200 l / min–423.8 ft³ / hour
Dimensions	Uncrated L 3,700 mm (145.6") W 1,580 mm (62.2") H 1,050 mm (41.3")	Crated 4,450 mm (175.2") 2,040 mm (80.3") 1,580 mm (62.2")
Weight	950 kg (2,094 lbs)	1,400 kg (3,086 lbs)
Colour	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

www.cyrel.eu

DuPont de Nemours (Deutschland) GmbH
DuPont Electronics & Communications
Hugenottenallee 175
63263 Neu-Isenburg, Germany
Tel: +49 (0) 6102 18 1592

DuPont (U.K.) Limited
DuPont Electronics & Communications
Wedgwood Way, Stevenage
Hertfordshire SG1 4QN, United Kingdom
Tel: +44 (0) 1438 73 4863

© 2013 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates.

All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents. EDS-EU0006-UK-1 (04/13)