


DuPont™ Cyrel® 3000 PS

State-of-the-Art Solvent Processor



[View Hi Res Image](#)

DuPont™ Cyrel® 3000 PS

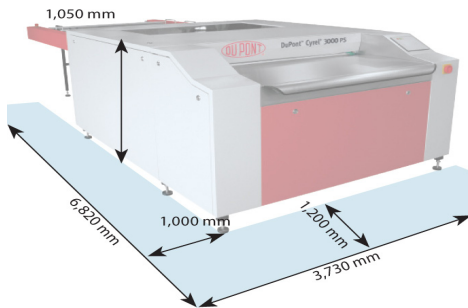

[View Hi Res Image](#)

Floor Plan



Play Video



Download latest version

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates ([analogue](#) and [digital](#)), Cyrel® platemaking equipment, [Cyrel® round sleeves](#), [Cyrel® plate mounting systems](#) and the revolutionary [Cyrel® FAST thermal system](#).

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® 3000 PS is designed to be the most durable and reliable processor on the market. It is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

DuPont™ Cyrel® 3000 PS

Benefits

- Increased productivity
- Minimal floor space
- Maximum plate size 1,320 x 2,250 mm (52" x 88")
- Innovative washout process
- High dot resolution and fine line definition
- Integrated viscosimeter
- Robust and easy to support

Product Features

DuPont™ Cyrel® 3000 PS is capable of processing high quality photopolymer plates up to a format of 1,320 x 2,250 mm (52" x 88").

High dot resolution, excellent line definition, deep reverses and clean floors are achieved to meet the highest flexographic standards, irrespective of whether thick, thin, narrow or large plates are being processed.

An innovative washout process, consisting of eight flat brushes transverse to each other and nine contra-

rotating round brushes, wash out the non-polymerised parts of the plate. Cleaning takes place through contra-rotating round brushes moistened with fresh solvent, clearing the plate of washout solution.

At the exit section, the plate is pulled over a rotating plush surface and pre-dried. At the same time, the relief side can air dry.

The solvent temperature is programmable between 20°C to 40°C (68°F to 104°F) to handle the different brands of solvents available to the industry. The speed at which the plates pass through can be preset to adapt to the individual plate types. The integration of fresh solvent is controlled via a viscosimeter, which is constantly monitoring the solvent saturation during the entire process. The Cyrel® 3000 PS unit is operated and controlled through a large colour touch screen panel. The computer control board may store up to 21 different wash-out plate programs.

DuPont™ Cyrel® 3000 PS

State-of-the-Art Solvent Processor

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 3000 PS	Incremental solvent processor
SAP Article Number	D14577947	
Plate Thickness	0.5 mm to 7.0 mm	0.019" to 0.27"
Max. Nominal Plate Width	1,320 mm (52")	
Min. Nominal Plate Width	200mm (7.87")	
Max. Nominal Plate Length	2,250 mm (88.5 inch)	
Fresh solvent tank	23 litres (5.0 Gal–UK)	
Min. solvent volume for operation	90 litres (19.8 Gal–UK)	
Max. solvent volume for operation	115 litres (25.3 Gal–UK)	
Max. tank volume	150 litres (33.0 Gal–UK)	
Electrical (Field Configurable)	380/400 Volt–50/60 hz; 220/230 Volt–50/60 hz	3Ph / N / PE; 3Ph / PE
Power (Nominal)	7 kW	
Current (Nominal Load)	16 Amp @ 400 Volt; 25 Amp @ 230 Volt	Connecting wires 5 x 2.5 mm²
Grounding	≤ 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
Exhaust	Ø 100 mm (3.9")	
Environmental Data	Temperature range: 15°C to 30°C (59°F to 86°F)	Relative humidity from 40% to 60% non-condensing
Compressed Air Supply	6 bar minimum	200 l / min–423.8 ft³ / hour
Dimensions	Uncrated D 4,670 mm (183.85") W 1,980 mm (77.9") H 1,050 mm (41.3")	Crated 5,300 mm (208.6") 2,300 mm (90.5") 1,600 mm (62.0")
Weight	1,460 kg (3,219 lbs)	2,120 kg (4,674 lbs)
Colour	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

www.cyrel.eu

DuPont de Nemours (Deutschland) GmbH
DuPont Electronics & Communications
Hugenottenallee 175
63263 Neu-Isenburg
Germany
Tel: +49 (0) 6102 18 1592

DuPont (U.K.) Limited
DuPont Electronics & Communications
Wedgwood Way, Stevenage
Hertfordshire SG1 4QN
United Kingdom
Tel: +44 (0) 1438 73 4863